


|                       |           |                       |                    |
|-----------------------|-----------|-----------------------|--------------------|
| Nominal Input Voltage | 12VDC     | Max. illum. Surface   | 500cm <sup>2</sup> |
| Output Voltage        | 55-156VAC | Storage temperature   | -30°C - +80°C      |
| Frequency             | 310-746Hz | Operating temperature | -10°C - +40°C      |

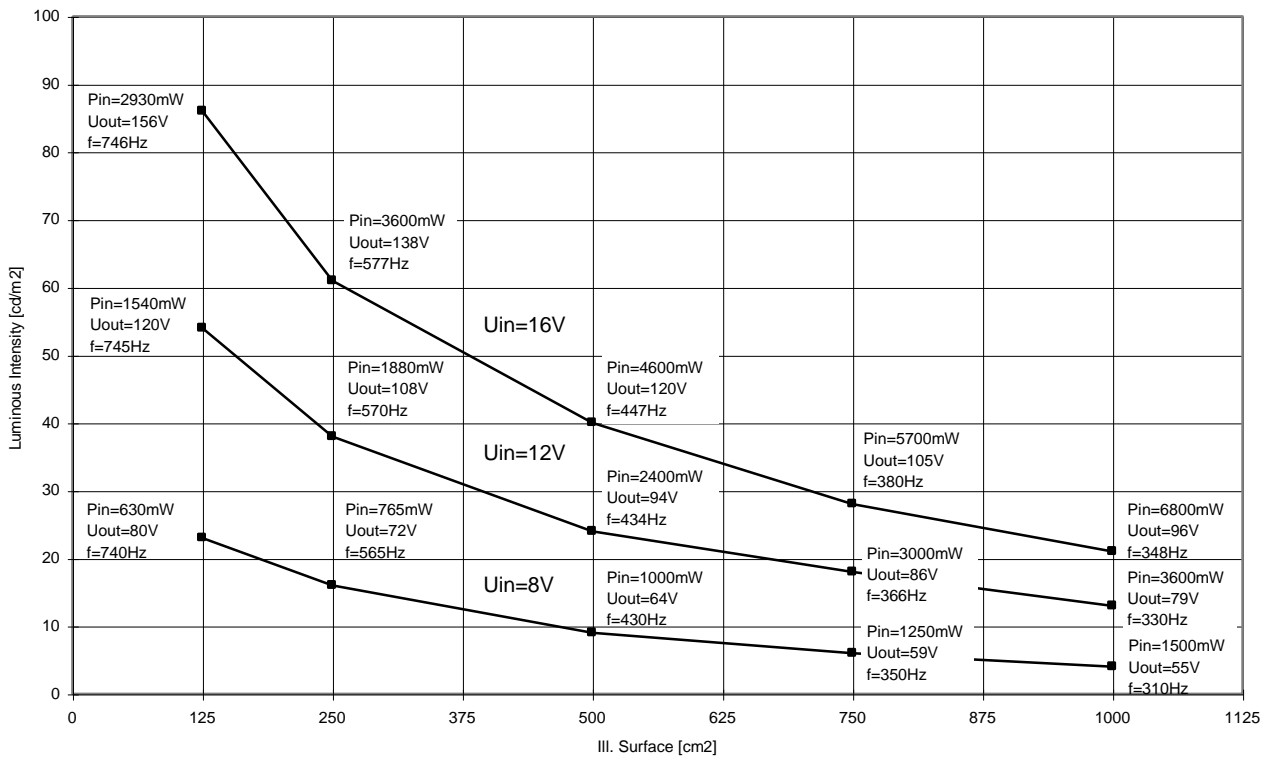

The measurement values on the above diagram are based on the following EL-datas:

|          |               |                                      |
|----------|---------------|--------------------------------------|
| ELF 2006 | Colour        | green-blue                           |
|          | Emission max. | 500nm                                |
|          | C passive     | 0.25 nF/cm <sup>2</sup>              |
|          | C active      | 0.39 nF/cm <sup>2</sup> @ 100V 400Hz |

**Caution: Running on the spot or short circuit can damage the EL-Driver!**