


# Specifications


# E040 511X

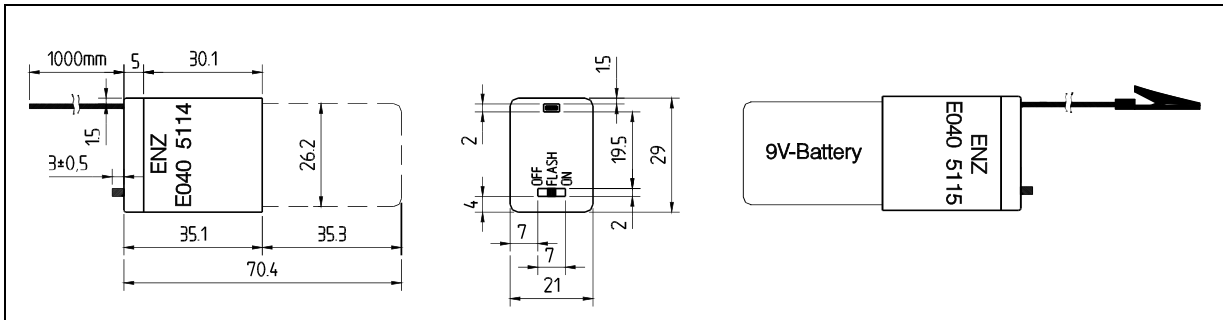

E040 5114 with battery holder

E040 5115 with battery + clamps

Nominal input	9VDC	Max. illum. surface	200cm <sup>2</sup>
Typ. output	50-140VAC	Storage temperature	-30°C - +80°C
Typ. frequency	460-1030Hz	Operating temperature	-10°C - +70°C

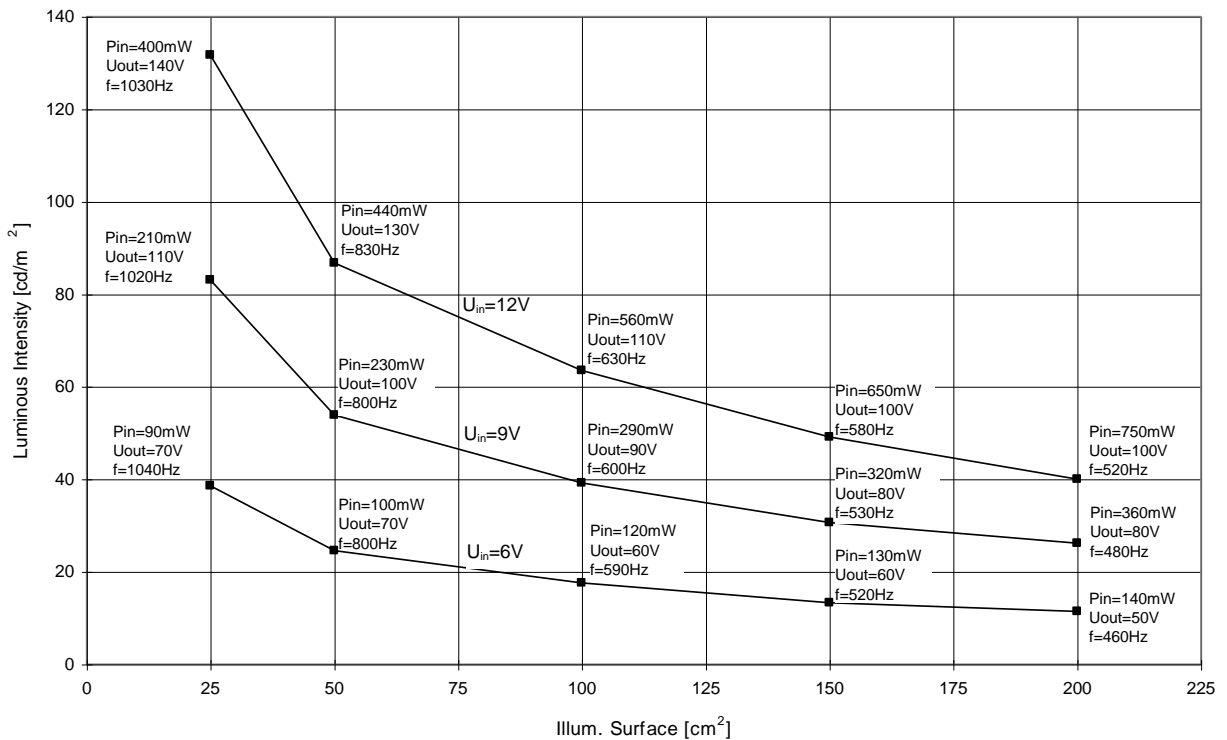

The measurement values on the above diagram are based on the following EL-datas:

ELF 2006	Colour	green-blue
	Emission max.	500nm
	C passive	0.25 nF/cm <sup>2</sup>
	C active	0.39 nF/cm <sup>2</sup> @ 100V 400Hz

**Caution: Running on the spot or short circuit can damage the EL-Driver!**