


Specifications


E040 703X

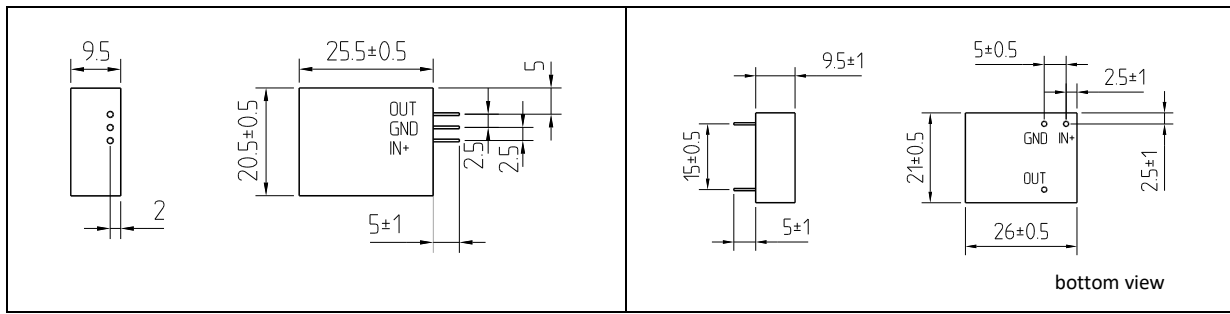

E040 7030 (standing)

E040 7031 (laying)

Nominal Input Voltage	24VDC	Max. Illum. Surface	200cm ²
Output Voltage	90-150VAC	Storage Temperature	-30°C - +80°C
Frequency	680-1180Hz	Operating Temperature	-10°C - +70°C

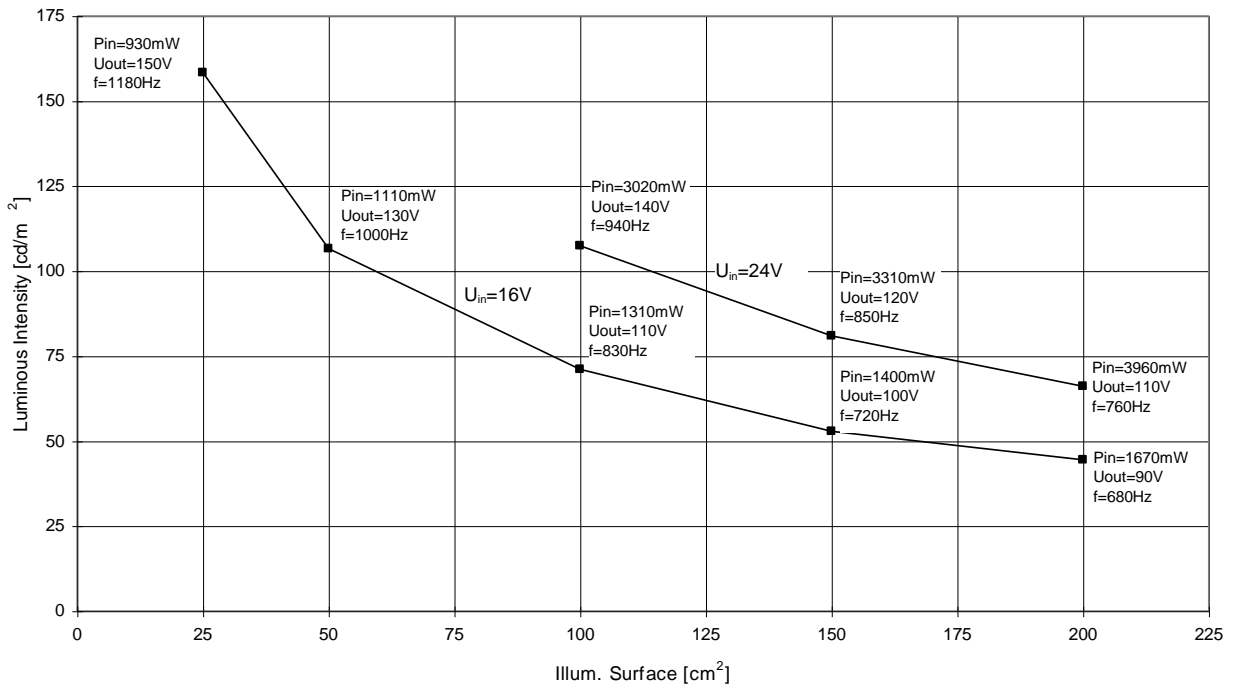

The values of above diagram are based on the following EL-datas:

ELF 2006	Colour	green-blue
	Emission Max.	500nm
ROHS compliant	C passive	0.25 nF/cm ²
	C aktive	0.39 nF/cm ² @ 100V 400Hz

Caution: Running on the spot or short circuit can damage the EL-Driver!