


# Specifications


# E040 703X

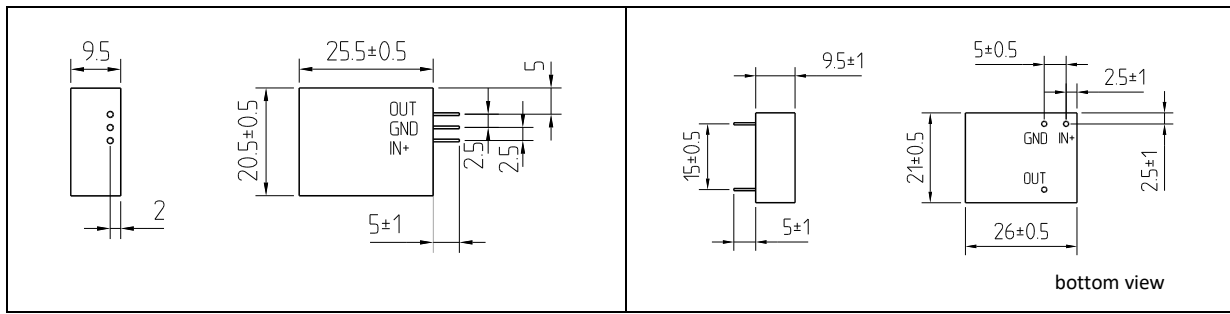

E040 7030 (standing)

E040 7031 (laying)

Nominal Input Voltage	24VDC	Max. Illum. Surface	200cm <sup>2</sup>
Output Voltage	90-150VAC	Storage Temperature	-30°C - +80°C
Frequency	680-1180Hz	Operating Temperature	-10°C - +70°C

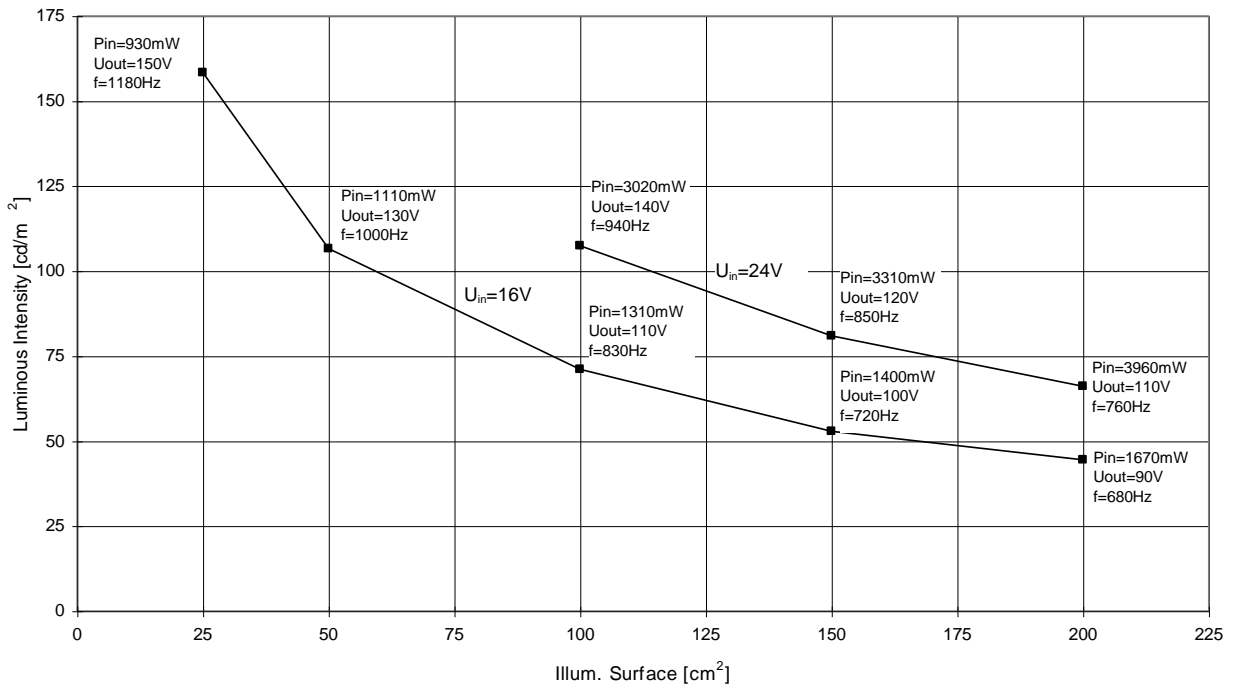

The values of above diagram are based on the following EL-datas:

<b>ELF 2006</b>	Colour	green-blue
	Emission Max.	500nm
<b>ROHS compliant</b>	C passive	0.25 nF/cm <sup>2</sup>
	C aktive	0.39 nF/cm <sup>2</sup> @ 100V 400Hz

**Caution: Running on the spot or short circuit can damage the EL-Driver!**